



Self-Laminating Labels

Extra Protection Against Harsh Industrial Environments

[Industritag.com/self-laminating-labels](https://www.industritag.com/self-laminating-labels)

Self-Laminating Calibration Labels

- Withstand extreme temperatures, including ultra-low temperature conditions and high-heat (-80°C/-112°F to +72°C/+161°F)
- Clear lamination protects the labels against harsh chemicals, abrasion, mechanical damage, as well as UV light and gamma irradiation
- Ideal for identifying equipment and tools that are regularly calibrated or inspected
- Hand-writable, these labels can include company logos and information, and once laminated, the information is protected and cannot be altered

Removable

SKU#	Label Size	Label Color	Text Color	Legend	Resistance
ZCALA-001-1R-TGA	0.75" x 1.5"	White	Green Apple	Calibration	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-001-1R	0.75" x 1.5"	White	Red	Calibration	-80°C to +72°C (-112°F to +161.6°F)
ZCAL-007-1R	1" x 2"	Green	Black	Opened	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-002-1R	1" x 2.125"	White	Red, Green Apple	Calibration	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-008-1R-TBL	1" x 2.125"	White	Blue	Preventive Maintenance	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-008-1R	1" x 2.125"	White	Red	Preventive Maintenance	-80°C to +72°C (-112°F to +161.6°F)
ZCAL-010-1R	1" x 2.125"	White	Black	N/A	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-015-1R	1" x 2.125"	Blue	Black	Inspected	-80°C to +72°C (-112°F to +161.6°F)
ZCAL-011-0.5R	1.5" x 2.5"	Green	Black	Open	-80°C to +72°C (-112°F to +161.6°F)
ZCAL-006-0.25R	2" x 3"	Orange	Black	Do Not Open	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-014-1R	3.25" x 1"	White	Blue	Monthly Preventive Maintenance	-80°C to +72°C (-112°F to +161.6°F)

Permanent

SKU#	Label Size	Label Color	Text Color	Legend	Resistance
ZCALA-001-1P	0.75" x 1.5"	White	Red	Calibration	-80°C to +72°C (-112°F to +161.6°F)
ZCALA-002-1P	1" x 2.125"	White	Red, Green Apple	Calibration	-80°C to +72°C (-112°F to +161.6°F)

CALIBRATION

I.D.

DATE

BY

DUE

#ZCALA-002-1

DO NOT USE

☐ Pending Qualification

☐ Pending Repair

☐ Other: _____

Initial: _____

Date: _____

#ZCAL-006-0.25

Equipment Type: _____

Serial #: _____

Company Name: _____

Calibration Date: _____ dd-mmm-yyyy

Date of expiry: _____ dd-mmm-yyyy

Initials: _____ Date dd-mmm-yyyy: _____

#ZCAL-010-1

OPENED

Date: _____ By: _____

Assigned Expiration: _____

#ZCAL-007-1

MAINTENANCE PRÉVENTIVE

Date : _____ Par : _____

Prochain service : _____

#ZCALA-013-1

MONTHLY
PREVENTIVE MAINTENANCE

ID #: _____

DONE BY: _____

DATE: _____

NEXT MAINT DATE: _____

#ZCALA-014-1

PREVENTIVE MAINTENANCE

I.D.

DATE

BY

DUE

#ZCALA-008-1

INSPECTED

Frequency: A S Q

Date: _____

By: _____

#ZCALA-015-1

Self-Laminating Printable Labels

- Withstand a range of temperatures, including high-heat conditions (up to +150°C/+300°F)
- Resist exposure to harsh chemicals, including alcohols, solvents, commercial thinners, acids, and bases
- Clear laminate protects the printout from abrasion, friction, and even sanding with a Dremel™ tool
- Can be printed with serialized information as well as 1D and/or 2D barcodes, using all common thermal-transfer printers, for improved asset tracking and maintenance




SKU#	Label Size	Printable Area	Adhesive	Label Color	Perforation	Resistance
ZSLPA-534NP	0.75" x 2.25"	0.5" x 2.25"	Permanent	White	No	-60°C to +150°C (-76°F to +302°F)
ZSLPA-284	1" x 2.125"	0.75" x 2.125"	Permanent	White	Yes	-60°C to +150°C (-76°F to +302°F)
ZSLTP-284	1" x 2.125"	0.75" x 2.125"	Permanent	White	Yes	-80°C to +93°C (-112°F to +199.4°F)
ZSLTR-284	1" x 2.125"	0.75" x 2.125"	Removable	White	Yes	-80°C to +93°C (-112°F to +199.4°F)

Self-Laminating Perforated Tape


- Produces on-demand laminated labels and tags
- The lamination protects the tape from wear-and-tear, chemical exposure, including oils, grease and industrial cleaners, abrasion, gamma irradiation, and UV light
- Hand writable calibration tape can be used to identify wires and cables, routinely services or inspected tools and machines, as well as regularly calibrated equipment
- Continuous tape format allows you to use as much or little as necessary



SKU#	Size (Inch x Ft)	Adhesive	Perforation Distance	Resistance
ZTCLP-38	1.5" x 65.6'	Permanent	Every 0.75"	-40°C to +93°C (-40°F to +199.4°F)

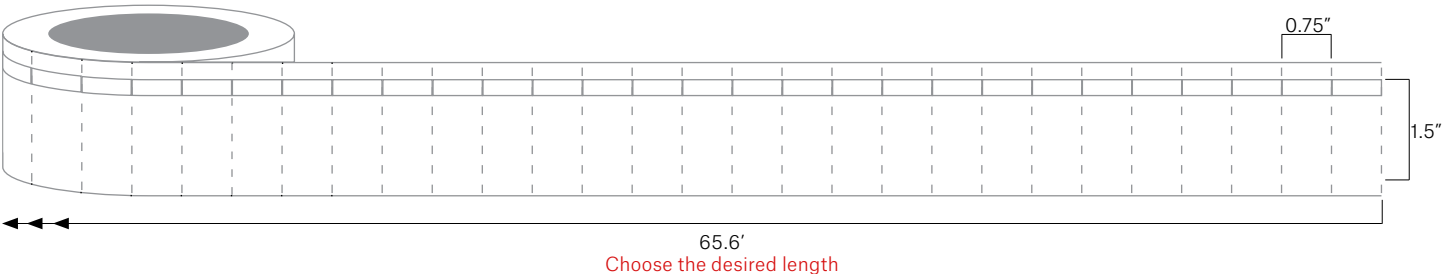

We Offer Custom Manufacturing!

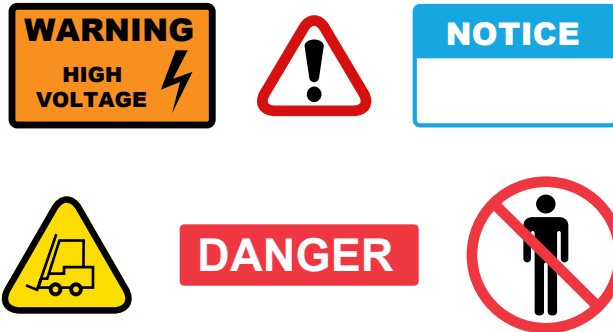

Choose from a range of materials, sizes, and formats, designed to withstand harsh working environments. Our dedicated support staff is always ready to help you design the right identification solution for your application, with labels that comply with North American and European regulations, including RoHS and UL standards.

Industritag.com/self-laminating-labels



USA / CANADA
+1-800-518-0364

INTERNATIONAL
+1-450-973-9420

www.industritag.com
info@ga-international.com

ISO 9001:2015 Certified / ISO 22301:2012 Compliant